


Please type a plus sign (+) inside this box → 

PTO/SB/05 (12/97)
Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number


UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	19671.701	Total Pages	39
	First Named Inventor or Application Identifier			
	Charles McElfresh			
	Express Mail Label No.	EL324596166US		

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input type="checkbox"/> Fee Transmittal Form (Submit an original, and a duplicate for fee processing)	6. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages <u>32</u>] (preferred arrangement set forth below) <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R&D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings- Detailed Description- Claim(s)- Abstract of the Disclosure	7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identify of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (37 CFR 1.152) [Total Sheets <u>7</u>]	8. <input type="checkbox"/> Assignment Papers (cover sheet & documents(s))
4. <input type="checkbox"/> Oath or Declaration [Total Pages <u> </u>] <ul style="list-style-type: none">a. <input type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below]<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).	9. <input type="checkbox"/> 37 CFR 3.73(b) Statement [] Power of Attorney (when there is an assignee)
5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	10. <input type="checkbox"/> English Translation Document (if applicable)
	11. <input type="checkbox"/> Information Disclosure Statement (IDS)PTO-1449 [] Copies of IDS Citations
	12. <input type="checkbox"/> Preliminary Amendment
	13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
	14. <input type="checkbox"/> Small Entity Statement(s) [] Statement filed in prior application, Status still proper and desired
	15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)
	16. <input type="checkbox"/> Other:

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. /

16. CORRESPONDING ADDRESS					
<input type="checkbox"/> Customer Number of Bar Code Label		021971		or <input checked="" type="checkbox"/> Correspondence address below	
		(Insert Customer No. or Attach bar code label here)			
NAME					
ADDRESS	WILSON SONSINI GOODRICH & ROSATI				
	650 Page Mill Road				
CITY	Palo Alto	STATE	California	ZIP CODE	94304-1050
COUNTRY	USA	TELEPHONE	(650) 493-9300	FAX	(650) 845-5000

SUBMITTED BY
Typed or
Printed Name Jeffrey D. Wheeler
Signature 

Reg. Number 39,066
Date April 2, 1999

**METHOD AND SYSTEM FOR OPTIMUM PLACEMENT OF
ADVERTISEMENTS ON A WEBPAGE**

Inventors: Charles McElfresh
Paul Mineiro
Michael Radford

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to a method and system for optimizing the
placement of graphical objects, e.g. advertisements (ads), topic tiles, or the like
on a page, e.g. a webpage, so that an event associated with the objects is more
likely to occur. Such an event would include the incidence of a user identifying,
or clicking on the object with a pointing device.

10 **Description of Related Art**

15 The Internet provides a fast, inexpensive, and convenient medium for
information providers to make information available to users on a website.
Information in such websites might include, for example, sports scores, movie
reviews, daily news, stock quotations, and the like. While password protected
pay-sites exist on the internet, websites can generally be accessed at no cost to
the user. This presents a problem regarding revenues returned in relation to
providing a website full of information. Some website providers are funded to
distribute various information to the public, for example NASA (National
20 Aeronautics and Space Agency) or other such public agencies. Still other
providers utilize their website as a commercial means in itself to sell various
products, such as books or compact discs. Regardless of such external funding,
the generation of revenue from a website is proving to be increasingly

important, as there are costs inherent in creating, providing, and maintaining a website. Moreover, as Internet traffic continues to increase, the opportunities for the generation of revenue in association with those contacted sites also tends to increase.

5 In response to such concerns, website providers are increasing the amount of advertising space on their webpages in order to generate more revenues. The advertisements (or ads) appear as banners, blocks, or tiles on various portions on the webpage. Typically, an advertisement serves as a click-through point to sources of more information about that particular advertiser or
10 topic. In other words, the advertisement exists as a graphical object which has a link to other information. The user typically chooses or identifies the object by clicking on it with a computer pointing device. The identification of the object invokes the link, and hence is often referred to as "click-through."

15 As with newspapers and other such advertising mediums, factors such as the location and size of the ad on a webpage will affect the price charged. Ads appearing at the start of the webpage will usually command a higher price than ads appearing at the end. This is particularly true for ads which appear further down from the initial webpage screen (as limited by the size of the user's display device). Web browsers usually require the positive act of a user
20 scrolling down a page in order to view an ad located further down from the top. A user who sifts through web pages based upon the initial material visible on the page often overlooks such lower placed ads. Ultimately, each advertiser wants to their ad to be seen, and to increase the amount of click-throughs, or viewing traffic, which visits its particular website or webpages as a result of a
25 click-through on its ad.

 Generally, most sites sell their advertising as a function of cost per thousand impressions, where an impression is counted as an instance of the ad appearing on a webpage. Ads can be randomly placed on a webpage, or advertisers might choose locations on the page. In the latter instance,

advertisers might be required to spend considerable time, money, and resources deciding where to place their advertisements, with the hope and anticipation of their ad being noticed, read, and even acted upon by the user. For instance, ads directed to younger Internet users might be placed on websites related to young celebrities, pop culture, or modern music. The ad might need to be placed near the top of the webpage in order to attract attention to the ad. This might require a costly expenditure by the advertiser, and would carry with it no assurances that the ad will attract any significant click-through traffic. As a result, the advertiser might be dissuaded altogether from placing the ad on a particular website or webpage. For every such decision by an advertiser not to place an ad, the revenues for a website or webpage which depends upon such revenues will be adversely affected.

Yet another way of selling advertising on the Internet is by charging the advertiser a certain amount for each click-through that occurs on a particular ad (often referred to as cost-per-click, or CPC). Such pricing structures might ultimately attract more attention from advertisers because the advertiser will not be required to pay unless the ad actually attracts click-through traffic. However, this pricing scheme shifts the impetus for deciding optimum ad placement back to the website or webpage provider, as no revenue will be generated for the provider if the user never clicks upon an ad.

Accordingly, a method and system are needed in this field which will serve to increase the chance of an event occurring for an object which is presented on a page. In the Internet context, a method and system are needed which would increase the amount of click-through traffic on ads presented on a webpage, and thereby increase the revenue generated by a website provider which sells ads on that webpage.

SUMMARY OF THE INVENTION

5 The present invention provides a method and system for placement of graphical objects on a page to optimize the occurrence of an event associated with such objects. The graphical objects might include, for instance, advertisements on a webpage, and the event would include a user clicking on that ad. The page includes positions for receipt of the object material. Data regarding the past performance of the objects is stored and updated as new data is received. A user requests a page from a server associated with system. The server uses the performance data to derive a prioritized arrangement of the objects on the page. The server performs a calculation regarding the likelihood that an event will occur for a given object, as displayed to a particular user. The objects are arranged according to this calculation and returned to the user on the requested page. The likelihood can also be multiplied by a weighting factor and the objects arranged according to this product.

10
15 As applied in context to an Internet based system, the present invention utilizes a unique system of gathering and grouping information about each particular user to the system, and then uses this information to optimize the event, or click-through traffic, for a particular graphical object, e.g. an ad, or set of ads, presented to that user. Optimization is achieved by calculating a click-through-percentage for a particular ad based upon sorted and categorized information about a particular user. This click-through percentage will consist, in part, of an estimation of the likelihood that a particular user will actually click on the ad presented. The click-through percentage is then used to group the ads, usually in descending order of calculated percentage, in the appropriate spots on a webpage. The ads might also be grouped according to click-through percentage times the cost-per-click for each ad. Topic tiles might also be displayed according to a similar formula, including for instance click-through-rate times the revenue-per-user.

20
25

According to either formula for ad placement, the revenue for the website provider will be significantly increased, as each click-through by a user will be more likely to occur, and also the page will be structured to generate an increased amount of revenue for each click-through. It has been found that the random placement of ads on a webpage yields a click-through-percentage of approximately 2-3%. By arranging the ads on a page in descending order of click-through-percentages (e.g. higher to lower), the general click-through rate has been found to at least double. By arranging the ads in descending order of click-through percentages times price-per-click, the overall revenue rate has been found to at least triple.

Other features can be summarized as follows: as a user interacts with various Internet sites, a file of information called a "cookie" is generated and maintained on a user's hard disk. A cookie typically records a user's preferences when using a particular site. A cookie is a mechanism that allows a server to store a file about a user on the user's own computer. The present invention includes providing a website which gathers and utilizes such information from the cookie file, but also generates and maintains a centralized database of information concerning each user. If a user is new to the site, then the user is redirected to areas where information about that user can be gathered. As the user proceeds through various website areas relating to topics such as movies or horoscopes, information such as age or zip codes can be gathered and stored for each particular user under a user identification (ID) number or tag. The data from the users is then analyzed, delineated, and placed in different groupings, or "bins." A device is used which creates meaningful bins, or in other words, bins of persons which have discernable behavioral differences between them. These bins might include, for example, demographical data such as persons of a certain income level, gender, or age grouping. This time intensive task of analyzing user information and creating different bins is performed as a

background task, and therefore does not adversely affect the overall speed of the system.

An ad server device is also used which queries the system for information about each particular user. The bins of information are used to calculate a click-through-percentage for each of the various ads available, based upon an analytical method which includes, among other things, parameters relating to the user's information, the categorized bins of data, and the prior performance information for a particular ad. This system will allow multiple bins to be used for a performance calculation without adversely affecting the speed of the calculation. If an ad is new to the system, a performance estimation is made which will allow convergence toward the true performance percentages through subsequent click-throughs and related calculations for that ad. A set of ads is then returned by the ad server for display to a particular user on the contacted website and associated webpages. The performance calculation for each ad, along with its price-per-click, are used to determine placement of the ads on a website for optimum click-through occurrences and generation of revenue.

The system might also include an ad performance interface which will allow an advertising client to access various ad performance information from an ad performance database relating to the click-through-percentage and success of each ad. Yet another interface might be provided which will allow an advertiser to place ads directly into an ad database for access by the ad server.

Therefore, according to one aspect of the present invention, a system is provided wherein a page is requested by a user, with the page has positions for placement of graphical objects. Each object has associated with it a link to other information, and a certain event will invoke that link. Certain performance data is stored regarding the occurrence of events for objects in the system. The performance data is used to calculate a likelihood for each object that the event will occur for that particular user. The page is then returned to the

user with a set of graphical objects arranged on the page, the objects positioned according to their event likelihood calculation.

According to another aspect of the present invention, a more specific example is provided. Namely, a system is provided wherein a website and associated webpages are made available by a web server, with the pages having ads arranged to provide optimized click-through generation of revenue deriving from the ads. The system gathers information relating to a user and stores this information in a central database under a user identification tag which is passed back to the user as part of the cookie data. The user data is further grouped into a variety of bins according to behavioral differences associated with such groups. A click-through-percentage is calculated for each ad based upon the user information, the associated bins, and the prior click-through-percentage associated with the ad. The ads are arranged on the webpage in descending order according to the calculated click-through-percentage for each ad.

According to another aspect of the present invention described above, the ads are arranged on the webpage in descending order according to the calculated click-through-percentage for each ad times the click-through-price for each ad.

Another aspect of the present invention described above displays topic tiles in descending order according to click-through-rate for a particular tile, times the revenue-per-user.

In still another aspect of the present invention described above, the device which groups the user data into a variety of bins is configured to perform its task periodically in the background, thereby minimizing slow down of the overall system.

Yet another aspect of the present invention provides an ad performance database, and an interface for the advertising client to access the performance database and review the performance parameters relating to a particular ad displayed according to this method.

A further aspect of the present invention provides an ad content and placement database, and an interface for the advertising client to place ads directly into the system.

Other aspects and advantages of the present invention can be seen upon review of the figures, the detailed description, and the claims which follow.

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 is an example of a prior art webpage in which ad sites are arranged to randomly receive placement of ads.

Figure 2 is an example of a webpage according to the present invention in which the ads (or topic tiles) are arranged in descending order by their click-through-percentage (CTP) or CTP times price-per-click (CPC).

Figure 3(a) is a block diagram of the functional components used for arranging the ads according to Figure 2.

Figure 3(b) is a block diagram of the Relational Ad (RAD) Server component of Figure 2.

Figure 4 is a block diagram of a sequence of interactions between the user, web site, and Recognizer elements of Figure 3(a), wherein a user is new to the optimizer network.

Figure 5 is a block diagram of a sequence of interactions between the user, web site, and Recognizer elements of Figure 3(a), wherein a user is new to the web site, but is already recognized by the optimizer network.

Figure 6 is block diagram of a sequence of interactions between the user, web site, and Recognizer elements of Figure 3(a), wherein a user has already visited the web site, and is already recognized by the optimizer network.

DETAILED DESCRIPTION

The present invention provides a method and system for optimizing the event occurrences for graphical objects on a page. More specifically and for

discussion purposes, a method and system are provided for optimizing revenues generated by a webpage. Optimization occurs through ranking of the ads (or topics) according to a click-through-percentage generated for each ad. The page might further be optimized by ranking the ads according to cost-per-click multiplied times the click-through-percentage. This will create a webpage that has both a high likelihood of click-throughs, and maximum revenue for each click-through that actually occurs. A detailed description of the invention is provided with respect to Figures 1-6.

Figure 1 shows a generalized block diagram layout of a prior art webpage 10. This page contains a web page title block 12, and a web page content block 14. A sequence of ad sites 16-20 are shown which receive and display ads configured to fit in these spots. In the past, such ads have been placed on the page according to an advertisers preferred (and/or paid for) page location. Alternatively the ads have been randomly placed upon the page, with some consideration for not repeating ads which a user might have seen before. The randomized placement of ads on a webpage has been found to result in a click-through-percentage for each ad of approximately 2-3%.

Figure 2 shows an example block diagram layout of a webpage 40 according to the present invention. A generalized web page content block 42 is shown in the right-center of page 40. In addition, the peripheral blocks for placement of ads, or topic tiles, are arranged in order to maximize revenue generation for the webpage. Note that a topic tile might consist of a click-through point for more sites and information about a particular topic, including for instance horoscopes or personals ads. In one embodiment, the most prominent block on the page, e.g. the uppermost banner block 44, will carry ads that have the highest probable click-through-percentage for a particular user. Ads with the next highest calculated click-through-percentage will be displayed in the next most prominent spot on the page, and so forth. The ads are typically grouped from top to bottom in descending order of calculated click-through-

percentage, as shown by blocks 46-50. If an ad spot is designated as more prominent, i.e. the ad spot is located in the unscrolled center of the user's display, then the click-through-percentage ranking and display of ads will follow the relative prominence designations for a particular page. Webpages arranged according to this method have been found to generate at least twice the revenue of webpages having randomly place ads.

In yet another embodiment, the ads can also be sorted and displayed according to a method which multiplies the calculated click-through-percentage times the cost-per-click for each ad. Under this method, the cost that the advertiser pays for each individual click-through on an ad will factor into the placement of the ad on the webpage. A more expensive ad with a moderate click-through-percentage might earn a more prominent position than an ad with a high click-through-percentage, but having a low price-per-click. If the multiplied result of the two factors produces a higher number, than the revenue generated from display of that particular ad will also be higher. Hence, such an ad will be displayed in more prominent position on the webpage in order to encourage more click-throughs by the user. Webpages arranged according to this method have been found to generate at least three times the revenue per page over webpages having randomly placed ads.

Figure 3(a) shows a block diagram of a system or network 100 for optimizing placement of ads on a webpage according the arrangement methods described above. While the elements are discussed in a certain order below, many of the processes occur simultaneously, or in other order sequences as necessary. As shown, a user 102 contacts a website 104 and requests a page 106. During the process of interacting with the web site, the user 102 will provide personal information 108 such as their birthday, gender, zip code, and the like. This information is sent from the web site 104 to a component used for recognizing certain characteristics about a user, hence referred to as the Recognizer 110. Depending upon the status of the user (e.g. new to the

network, new to the website, or known by the system), the interactions of the user, website, and Recognizer will vary. A centralized database is used, however, to store various information which has been collected about a user. The information is accessible via a user identification (Id) tag or number, which is created for each user. The interactions of the user, website, and Recognizer are detailed further in the discussion of Figures 4, 5, and 6 below.

In essence, when a site wants to show a page, it contacts an ad server component 112, shown at the center of the network 100 in Figure 3(a). This device might also be referred to as a relational server component, and is hence referred to as the Rad Server. The site contacts the Rad Server and indicates which webpage and website will be shown, as well as the centralized Id of the user who will view the page. The Rad Server 112 performs the overall function of gathering the necessary information regarding a particular ad (or set of ads) and the particular user and generating a set of ads which have been optimized for placement on a webpage according to a calculated click-through-percentage (or click-through-percentage times price-per-click) for that user.

Referring now to both Figures 3(a) and 3(b), additional operational steps of the Rad Server are shown. Initially, the Rad Server 112 will query the Recognizer 110 for as much information 114 as is known about the particular user. The Recognizer then returns the information requested 116 back to the Rad Server 110 for use in requesting possible ads for placement and performing ranking calculations regarding those ads.

In order for the optimizer system to have ready access to a large store of ads, an ad/content placement database 118 is provided for storing a plurality of ads, which might be used for possible display. The ad/content placement database 118 might contain, for example, information about each ad contract, e.g. price per impression, price-per-click-through, constraints on pages or positions where the ad may be placed, and/or constraints on demographic variables which must hold for the ad to be presented. The database 118 might

also contain information associated with different page layouts, e.g. the number of banner or ad spots available.

Such ads are created and/or purchased by the advertiser 120 who might use an ad placement interface 122 (which is optional) to place ads 124 in the database 118. The interface 122 could be web accessible and would guide the advertiser 120 through the necessary steps for creating and uploading an ad into the database 118. Alternatively, the general content of the ads is created and/or licensed 126 by administrators of such accounts and entered 128 into the ad/content placement database 118. The Rad Server 112 requests possible ads or content material 130 based upon information from the particular user 102 from the ad/content placement database 118. The database 118 then returns the possible ads 132 for placement on the webpage that fit the particular characteristics of the user 102.

With the possible ads 132 now collected, as shown by element 131 in Figure 3(b), the Rad Server 112 performs a click-through percentage calculation for each ad, as shown by element 133 in Figure 3(b). This calculation further requires access to performance information for each ad. Accordingly, an ad/content performance database 140 is provided which stores click-through-percentage data for each ad, as well as data concerning the grouping of users into different categories, or bins. A processing device, hereafter referred to as the Arbitrator 150, takes information gathered and stored about the users and processes this information into useful bins. The user data is sampled and bins are continually created which differentiate users in optimal ways for placement of ads. For example, a bin of all users under 14 years old might be created as one separate bin, rather than all users under 18 years old. This strategy for categorizing users becomes important when trying to predict or calculate a click-through-percentage for a given ad, or set of ads.

Referring again to Figure 3(a), when a user clicks on a particular ad as shown by 107, a click-through tracker 109 is provided to track and then record

the click-throughs 111 into a log file 113. The log file 113 also collects ad impression data 121 from the Rad Server 112. The log file 113 outputs the log data 115 into a device referred to as a log digester 152. The log digester 152 interacts with the Arbitrator 150, as shown by dataflows 117 and 119. The log digester 152 processes through all the user data, and places each bit of user data in its appropriate bin according to directions from the Arbitrator 150. The Arbitrator 150 runs periodically to determine how best to differentiate among users. The more differences that the Arbitrator finds, then the more efficiently it will be able to deliver ads that users will click on, or content that users will enjoy. Both the Arbitrator 150 and log digester 152 functions are generally time intensive operations and can take significant processing resources. In this embodiment, these tasks are shown to run in the background so as not to slow down the overall system performance. Typically, the Arbitrator 150 will be configured to interact with the log digester 152 every 15 minutes or less and the log digester 152 will output processed data to the ad/content performance database 118. The ad/content performance database 118 is therefore a static database that is updated periodically from the log digester 152. The update rate is variable and can be further improved through via system code optimization, increased processor speeds, dedicated hardware, and the like.

Referring again to Figures 3(a) and 3(b), the Rad Server 112 sends a request 134 for performance statistical data (or performance stats) to the Ad/Content performance database 140 and the requested performance stats 136 are returned to the Rad Server 112. A click-through-percentage 133 is calculated for each ad based upon the performance stats and the user information. The Rad Server 112 thereafter ranks the ads according to a desired arrangement method 135. While other equivalent methods are intended to be included within the scope of this invention, the methods discussed above include arranging the ads according to: click-through-percentage; or click-through-percentage times price-per-click for each ad. Topical tiles might also

be arranged according to the click-through-rate for each topic, times the revenue-per-user.

Referring again to Figure 3(a), the website 104 requests ads from the Rad Server 112 as shown by dataflow 160. After the steps described above are performed, the Rad Server 112 delivers a set of ads for display to the user which have been optimized for increased click-throughs, and/or increased revenue generation for the webpage provider.

Yet another interface 170 might (optionally) be provided which would provide the Advertiser 120 with the ability to monitor and track the performance of their ads. The ad performance interface 170 would collect performance stat data 172 from the ad/content performance database 140. The interface would thereafter provide user-friendly and viewable data 174 to the client regarding detailed stats, including for instance demographic profiles of who is clicking on their ads. Such information could prove invaluable to the advertiser for targeting future customers with particular ads. The information would also serve to demonstrate the success rate, and thereafter aid in setting the pricing structure of ads, in order for the network provider to further increase revenues.

The optimizer 100 further uses a unique sequence of steps to gather information from each particular user. These sequences are shown in Figures 4, 5, and 6. Normally, a cookie is used by websites to detect information about a user. A cookie is a special text file that a website stores on the user's harddrive. Typically a cookie records a user's preferences when using a particular site. Using the Internet's Hypertext Transfer Protocol (HTTP), each request for a webpage is independent of all other requests. For this reason, the webserver generally has no memory of what pages it has sent to a user, or information about that user. A cookie is a mechanism that allows the server to store its own file about a user on the user's own computer. The file is typically stored in the subdirectory of the browser directory. The cookie subdirectory will contain a cookie file for each website which a user has visited, and which uses cookies.

Cookies have been previously used to rotate the ads that a site sends so that a page does not keep sending the same ad as it sends a succession of requested pages. Cookies have also been used to customize pages based upon the browser type. Generally, users must agree to let cookies be saved for them, and such is the common practice as it speeds up web service. Yet another practice is for a user to create a file of personal information, or a profile, for use by a contacted website.

According to the present invention, the previously mentioned centralized Id number or tag is created for each user and provides access to stored information about the user within the optimizer system. When a site learns a new piece of information about a user, e.g. zip code, this information is sent to the Recognizer which enters this information into the centralized database. While many different forms of databasing would provide an equivalent result, the preferred embodiment uses a non-relational database that has been written for scalability and speed. When a site queries the Rad Server for a set of ads to place on a page, the site passes the centralized Id to the Rad Server, which in turn requests any relevant information associated with that user Id from the Recognizer database. The Recognizer database might also be queried by individual site, e.g. for dynamically targeted content generation. Separate authentication would be provided for read and write access to the Recognizer database.

Hence, when the Rad Server 112 requests user information, then the databased information can be readily provided via the Id. Figure 4 shows the sequence of steps that occur when a user is new to the network. In step (a) the user (U) 200 sends a request 202 to the web server (W) 204 for a page of information. In step (b), the web server 204 redirects 208 the user 200 to the Recognizer (R) 206. In step (c), the user request 210 is redirected via a redefined URL (uniform resource locator). The Recognizer 206 assigns a new Id to the user and saves it in a database. In step (d), the Recognizer 206

5 redirects 212 the user 200 back to the web server 204 with the user Id appended to the URL. The Recognizer 206 also sends a Recognizer cookie file 214 back to the user 200. In step (e), the user 200 sends a request 216 for the original page desired, but with the Id appended. In step (f), the web server 204 returns its own cookie 218 with the Id, along with the webpage 220, which the user requested (with the ads optimally arranged).

10 Figure 5 shows the sequence of steps which occurs when the user is new to the web server, but has already been databased in the optimizer network. In step (a), the user 200 requests 222 a webpage from the web server. In this instance, the website has not been previously visited by the user. In step (b), the web server 204 redirects the user 200 to the Recognizer 206. In step (c), the user 200 requests 228 the URL from the Recognizer 206. Since the user has already visited the optimizer network, they have a cookie 226 which is passed back to the Recognizer 206. In step (d), the Recognizer 206 redirects 230 the user 200 to the site with the Id appended. In step (e), the user 200 sends a request 2232 for the original page desired, but with the Id appended. In step (f), the web server 204 returns its own cookie 234 with the Id, along with the webpage 236, which the user requested (with the ads optimally arranged).

15
20 Figure 6 shows a sequence of steps which occurs when the user has already visited an optimizer network site. In step (a), the network has already established a cookie for the user with the centralized Id. The Recognizer 206 is therefore not involved in the interaction. The user 200 sends a request 240 for a webpage to the web server 204, along with the existing cookie file 238. In step (b), the web server 204 responds by sending the requested webpage 242 (with the ads optimally arranged).

25 In each case, the website will request HTML code from the Rad Server 112 to place in the appropriate advertising blocks of the webpage. The Server outputs this information to the user, and the information is thereafter decoded and arranged by the user's web browser. When the user clicks on an ad, they

are redirected through optimizer so that the click-through can be counted, and the user is thereafter sent to the URL specified by the Advertiser.

In providing further details to elements described above, the Arbitrator 150 in Figure 3(a) has the task of creating many different bins of data as characteristics about the users are learned and delineated. Normally, when any new factor (e.g. a new bin) is introduced into a system like the present, the complexity of implementation increases greatly, as each factor will typically need to be multiplied by every other existing factor in the system. As a result, variables must be partitioned into a small number of equivalence classes in order to make feasible the learning problem. This creates pressure towards choosing a small number of bins for each variable. However, in the limit that there is only partition (one type of user), the learning problem is greatly simplified, but the available information is not being maximally exploited for monetary gain. This is the classic "information/complexity" tradeoff in learning theory: the more powerful the model, the more difficult it is to learn the parameters.

While a variety of solutions might be applied, the preferred embodiment of the present invention applies a classical statistical technique for hypothesis testing, i.e. the generalized likelihood ratio test, as follows. Starting with a given a particular random variable X which takes values in the set S_X , and a set of ads A such that for each ad $a \in A$ and value $x \in S_X$, the result includes associated impressions counts $I_X(x, a)$ and click-through counts $C_X(x, a)$. Next, consider a function $f: S_X \rightarrow S_B$ which assigns values in S_X to equivalence class labels in S_B . Associated with each $b \in S_B$ are the impression and click-through counts $I_B(b, a) = \sum_{x|f(x)=b} I_X(x, a)$ and $C_B(b, a) = \sum_{x|f(x)=b} C_X(x, a)$, respectively. These counts can be used to assign a score to f for a given ad $a \in A$ via

$$\phi(f, a) = 2 \left(\sum_{b \in S_B} \max_{\lambda} \{ \log p(I_B(b, a), C_B(b, a), \lambda) \} \right) - 2 \max_{\lambda} \left\{ \sum_{b \in S_B} \log p(I_B(b, a), C_B(b, a), \lambda) \right\}$$

Where p is standard binomial likelihood given by

$$p(c, n, \lambda) = \binom{n}{c} \lambda^c (1 - \lambda)^{n-c}$$

5

This test can be interpreted as measuring the difference between the "explanatory power" that is achieved by assuming that the click-through rate for the ad in question varies in any fashion across the equivalence classes in question (first term), versus the "explanatory power" obtained by assuming that the click-through rate is identical across equivalence classes (second term).

10

The asymptotic distribution of ϕ is known to be X^2 with degrees of freedom $|S_B| - 1$, which allows proper normalization of the score with respect to number of equivalence classes. The following formula is used to transform ϕ into a random variable approximately distributed as zero-mean unit-variance Gaussian.

15

$$z(f, a) = \sigma(|S_B| - 1)^{-1} \left(\frac{\phi(f, a)}{|S_B| - 1} - \mu(|S_B| - 1) \right)^{1/3}$$

$$\mu(n) = 1 - \frac{2}{9n}$$

$$\sigma(n) = \sqrt{\frac{2}{9n}}$$

20

As can be seen from the formula, this normalization discourages partitioning into a large number of equivalence classes (i.e., large $|S_B|$); however, if the increase in explanatory power (i.e., ϕ) is sufficiently large it can overcome this

"bias" against fine-grained partitioning. In this manner the information/complexity tradeoff is represented.

The above score is averaged over the current population of ads to assign a score Q to the potential partitioning f , $Q(f) = \sum_{a \in A} z(f, a)$. In principle, a procedure to enumerate all possible partitionings and choose the one with the largest score Q is possible, but (currently) in practice a human suggests several possible ways to partition the data, Q is calculated for each candidate partition, and the partitioning with the highest score is used in the online system. Since the complexity of model supported by the data increases with the amount of data, the appropriate partitioning for the system can change with time, e.g., if the amount of visitors to the site increases dramatically. Thus the arbitrator is used both when first introducing a variable into the system, and for periodically tuning the distinctions the system makes in order to maximize performance.

In providing further detail to certain elements described above, element 133 in Figure 3(b) describes a click-through-percentage calculation which is performed for each ad. This calculation provides a probability or likelihood, expressed as a percentage, that a user will click on a particular object or ad. While many different processes might be used within the scope of optimizing revenue generation through the placement of ads by using click-through-percentage, the present invention employs the technique further detailed as follows: The value of placing an ad includes a fixed, known amount of revenue per impression (possibly even zero), plus some amount of revenue that would be generated if the ad were clicked on. Since clicking on the an ad is a random event, the Rad server attempts to estimate the average amount of revenue that results from click-throughs, which is given by the probability that the user will click on the ad times the amount of revenue generated when the ad is clicked on. The ad server is therefore attempting to maximize, on average, the revenue resulting from a particular assignment of ads to the page. The ad server estimates the probability of clicking on an ad using formulas derived from

Bayesian statistical methodology, which click-through modeled as a binomial process, and with a prior model of advertisement appeal given by exponential distribution parameterized by a single parameter p_0 .

First, the system should determine the value of factors used in predicting performance. Demographic information associated with a user Id is retrieved from the Recognizer. Other information is obtained from the site requesting the ad placement, e.g the page the ads will be shown on. Still other information, e.g. the time of day, is determined by the ad server.

Second, for each possible assignment of an ad to a spot on the page, and for each factor whose value is known, the ad server obtains the number of impressions and click-throughs seen for that ad in that spot with the factor in question. These counts are used to estimate the likelihood p that the user will click on the ad, according to the following formula:

$$\hat{p}(q, s, p_0) = \frac{\phi(q, s, p_0)}{\phi(q, s, p_0) + \varphi(q, s, p_0)}$$

$$\phi(q, s, p_0) = \alpha(c(s), i(s), p_0) \prod_{i=1}^N \theta(c(s | q_i), c(s | q_i) + i(s | q_i), \theta(c(s | q_i), c(s), r(i)))$$

$$\varphi(q, s, p_0) = (1 - \alpha(c(s), i(s), p_0)) \prod_{i=1}^N \theta(n(s | q_i), c(s | q_i) + i(s | q_i), \theta(n(s | q_i), n(s), r(i)))$$

$$\theta(a, b, k) = \frac{a + 1}{b + (1/k)}$$

$$\alpha(a, b, p_0) = \eta(b, p_0) - \sqrt{\eta^2(b, p_0) - 8(2 + a)p_0}$$

$$\eta(b, p_0) = 2 + (2 + b)p_0$$

$$n(s) = i(s) - c(s)$$

$$n(s | q_i) = i(s | q_i) - c(s | q_i)$$

where

q = context vector

$c(s)$ = clicks count for content s

$i(s)$ = impression count for content s

$c(s|q_i)$ = click count for content s given factor i takes value q_i

$i(s|q_i)$ = impression count for content s given factor i takes value q_i

$r(i)$ = total possible values for factor i

These equations incorporate the assumptions that factors are conditionally independent, factor values are distributed multinomially with a product exponential prior peaked at a uniform distribution, and that clickthroughs not conditioned on factor values are distributed binomially with an exponential prior peaked at p_0 . p_0 is purposely chosen to overestimate the probability of click-through so that the estimator converges to the actual probability of click-through from above. This is particularly true for new ads in which little (or no) information is known. A less efficient system might, for instance, randomize all the ads 20% of the time, then measure the relative performance, and then optimize the placement of ads. The present system, however, proves to be much more efficient as optimization is constantly being performed. The present system serves to automatically balance the opposing goals of gathering data on newer ads and exploiting information about older ads. In this way, the number of impressions is greatly reduced which the system might need to show in order to make an accurate prediction of click-through rate for a particular ad.

Once derived, the list of possible assignments of ads to particular ad spots is sorted in descending order of expected revenue. While there are subsequent empty spots, the ad server examines the next assignment on the list, and accepts the assignment unless it would violate a placement constraint, in which case it is discarded. If possible assignments are exhausted before the page is filled, the Rad Server might then fill the remaining positions with a canonical identifier indicating the spot is to remain empty. The list of acceptable assignments is then returned to the requesting website.

The optimizer system can serve optimized ads to any site on the Internet. In addition to the above-described features, it is intended that the optimizer system will remain able to target ads to specific demographics. For example, the advertiser can target ads only to users between the ages of 25 and 35, or to

users who live in zip codes which represent upper-level incomes. Such targeting is independent of the optimization scheme described above. In other words, an advertiser can target any age group it desires, regardless of whether or not that group aligns with one of the aforementioned data bins. Relatedly, the optimizer system can be overridden. If an advertiser wishes to purchase the right to an entire section of the website or webpage, the ads can simply be placed there without having to compete their way into that position on the page.

The foregoing description of a preferred embodiment of the invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Obviously, many modifications and variations will be apparent to practitioners skilled in this art. It is intended that the scope of the invention be defined by the following claims and their equivalents.

CLAIMS

What is claimed is:

1 1. A method of providing placement of graphical objects on a page
2 accessible by a user, the graphical objects including graphic and text symbols,
3 the page having positions for receipt of the objects, each object having at least
4 one of a link to information, the link being invoked by an event identifying the
5 object by a computer pointing device, the method comprising the steps of:

6 storing and retrieving performance data associated with the likelihood of
7 the event occurring for each object; and

8 arranging the objects on the page according to the performance data.

1 2. The method according to Claim 1, wherein the performance data
2 is used to calculate a likelihood that the event will occur, and the arranging of
3 the objects is prioritized according to this likelihood calculation.

1 3. The method according to Claim 2, wherein each object has an
2 associated weighting factor, the likelihood calculation is multiplied times the
3 weighting factor, and the arranging of the objects is prioritized according to this
4 product

1 4. The method according to Claim 1, wherein the likelihood
2 calculation includes computing a statistical probability that a user will identify
3 the object.

1 5. The method of Claim 4, wherein the performance data for the
2 objects has been grouped and sorted according to user characteristics, and the
3 statistical probability is computed based upon the user information, and upon
4 past performance data for that object.

1 6. The method according to Claim 3, wherein the objects include
2 advertisements and the weighting factor includes the price of the advertisement.

1 7. The method according to Claim 4, wherein the price of the
2 advertisement is measured by the amount paid by the advertiser for each time a
3 user identifies the advertisement.

1 8. The method according to Claim 1, wherein the page includes a
2 webpage, on at least one website, accessible by an Internet based system, and
3 the link includes a Uniform Resource Locator.

1 9. A method of providing for placement of graphical objects on a
2 page accessible by a user, the graphical objects including graphic and text
3 symbols, the page having positions for receipt of the objects, each object having
4 a link to information, the link being invoked by an event identifying the object
5 by a computer pointing device, the method comprising the steps of:

6 receiving a request for a page from a user;
7 collecting and storing information about the user;
8 retrieving graphical objects for possible inclusion in the page which
9 have been grouped according to the user information;
10 retrieving past performance data about the graphical objects;
11 calculating a likelihood that a graphical object will experience an event
12 based upon the past performance data; and
13 returning the requested page to the user with the graphical objects which
14 have a higher event likelihood being arranged in more visually prominent
15 positions on the page.

1 10. The method of providing for placement of graphical objects on a
2 page according to Claim 9, wherein each object has an associated weighting

factor, the likelihood calculation is multiplied times the weighting factor, and the arranging of the objects is prioritized according to this product.

11. The method of providing for placement of graphical objects on a page according to Claim 9, wherein the user information is stored in a centralized database, with the user information accessible via a user identification tag assigned to each user.

12. The method of providing for placement of graphical objects on a page according to Claim 11, wherein the method is employed by a system including at least one host site, the site including at least one webpage, and if the user is new to the system, the step of collecting and storing information about the user includes the following steps:

redirecting the user request for a page from the site over to a processing device for recognizing the user;

using the processing device to extract and collect information about the user;

storing this information in the centralized database under the user identification tag;

passing a processing device cookie file, which includes the identification tag, back to the user;

redirecting the user from the processing device to the site with the identification tag attached to the request;

retrieving the user information databased under the identification tag;

and

wherein the final step of the Claim further includes returning a cookie file from the site to the user, the cookie file including the identification tag.

13. The method of providing for placement of graphical objects on a page according to Claim 11, wherein the method is employed by a system

3 including at least one host site, the site including at least one page, and if the
4 user is new to the site but has previously visited the system, the step of
5 collecting information about the user to the website includes the following
6 steps:

7 redirecting the user request to the site over to a processing device for
8 recognizing the user, along with a processing device cookie file which already
9 exists for the user;

10 redirecting the user from the processing device to the site with the
11 identification tag attached to the request;

12 retrieving the user information databased under the identification tag;

13 and

14 wherein the final step of the Claim further includes returning a cookie
15 file from the site to the user, the cookie file including the identification tag.

1 14. The method of providing for placement of graphical objects on a
2 page according to Claim 11, wherein the method is employed by a system
3 including at least one host site, the site including at least one page, wherein if
4 the user has previously visited the site and the system, the step of collecting
5 information about the user to the site includes the following steps:

6 receiving a cookie file including the user identification tag along with
7 the request for a page; and

8 retrieving the user information databased under the identification tag.

1 15. The method of providing for placement of graphical objects on a
2 page according to Claim 9, wherein the performance data includes counts of a
3 user identifying an object (click-through counts) and counts of each time an
4 object is displayed (impression counts), and the step of calculating a likelihood
5 uses a summation of click-through counts, and a summation of impression
6 counts, along with the prior likelihood for each advertisement.

1 16. The method of providing for placement of graphical objects on a
2 page according to Claim 15, wherein the prior likelihood is set to a high value
3 for objects which are new to the system.

1 17. The method of providing for placement of graphical objects on a
2 page according to Claim 9, wherein a device is employed for creating and
3 maintaining data groups which are differentiated by user characteristics, the
4 processor also being used for sorting and storing performance data concerning
5 the objects into the new and existing data groups.

1 18. The method of providing for placement of graphical objects on a
2 page according to Claim 17, wherein the device runs periodically in the
3 background.

1 19. A system for providing placement of graphical objects on a page
2 accessible by a user, the graphical objects including graphic and text symbols,
3 the page having positions for receipt of the objects, each object having at least
4 one of a link to information, the link being invoked by an event identifying the
5 object by a computer pointing device, the system comprising:

6 a device for storing data associated with the past performance of an
7 object;

8 a server for prioritizing objects on a page according to the data.

1 20. The system according to Claim 19, wherein the server performs a
2 calculation which predicts the likelihood of an event occurring for the object,
3 and the server prioritizes the objects on the page according to this calculation.

1 21. The system according to Claim 20, wherein a weighting factor
2 for each object is multiplied times the likelihood of an event occurring, and the
3 server prioritizes the objects on the page according to this product.

1 22. The system according to Claim 19, which further includes a
2 device for creating and arranging data groups for storing the data associated
3 with the past performance of an object.

1 23. The system according to Claim 22, wherein the data groups are
2 delineated by user characteristics.

1 24. The system according to Claim 23, which further includes a
2 device for gathering and storing user information.

1 25. The system according to Claim 24, wherein the server collects a
2 set of objects associated with the user information, and the server performs a
3 calculation which predicts the likelihood of an event occurring for each object
4 within the set from the data associated with the past performance of the object,
5 and the server prioritizes the objects on the page according to this calculation.

1 26. The system according to Claim 24, wherein the server collects a
2 set of objects associated with the user information, and the server performs a
3 calculation which predicts the likelihood of an event occurring for each object
4 within the set from the data associated with the past performance of the object,
5 a weighting factor for each object is multiplied times the likelihood of an event
6 occurring, and the server prioritizes the objects on the page according to this
7 product.

1 27. A system for providing placement of graphical objects on a page
2 accessible by a user, the graphical objects including graphic and text symbols,

3 the page having positions for receipt of the objects, each object having at least
4 one of a link to information, the link being invoked by an event identifying the
5 object by a computer pointing device, the system comprising:
6 a device for recognizing users which collects and provides information
7 about users of the system;
8 a device for creating and arranging data groups according to user
9 characteristics;
10 a database which stores statistical performance data about the objects
11 according to the data groups;
12 a database for storing advertisement and content information for possible
13 placement on the page; and
14 an advertisement server which:
15 receives a request for a page from a user;
16 retrieves user information from the device for recognizing users;
17 retrieves advertisements for possible placement on the page from
18 the database using the user information;
19 calculates a likelihood that an event will occur for each object by
20 retrieving and using the statistical performance data from the database; and
21 returns the page with the objects arranged according to their
22 event likelihood.

1 28. The system according to Claim 27, wherein the device for
2 recognizing users interacts with a centralized database which uses identification
3 tags assigned to each user for accessing user information.

1 29. The system according to Claim 27, wherein the system further
2 includes devices for counting when a user identifies an advertisement (click-
3 through counts), and the times an advertisement is displayed (impression
4 counts), and the information is logged into a database.

1 30. The system according to Claim 29, wherein the logged
2 information is processed, according to direction from the device for creating and
3 arranging data groups according to user characteristics, to provide the statistical
4 performance data in the respective database.

1 31. The system according to Claim 30, wherein the processing is
2 performed periodically as a background task.

1 32. The system according to Claim 27, wherein an interface is also
2 provided which allows access to view the statistical performance data associated
3 with an object.

1 33. The system according to Claim 27, wherein an interface is also
2 provided which facilitates placement of objects within the database for storing
3 advertisement and content information.

1 34. A system for providing placement of graphical objects on a page
2 accessible by a user, the graphical objects including graphic and text symbols,
3 the page having positions for receipt of the objects, each object having at least
4 one of a link to information, the link being invoked by an event identifying the
5 object by a computer pointing device, the system comprising:

6 means for arranging and storing objects according to data groups of user
7 characteristics;

8 means for receiving a request for a page from a user;

9 means for collecting information about the user;

10 means for retrieving objects from data groups corresponding to the user
11 information;

12 means for calculating the likelihood of an event occurring; and

13 means for returning the requested page to the user with the objects
14 arranged according to the event likelihood calculation for each object.

1 35. The system according to Claim 34, wherein the system also
2 includes a means for multiplying the event likelihood calculation times a
3 weighting factor for each object to yield a product, and the requested page is
4 returned to the user with objects having a higher resulting product arranged in
5 the more visually prominent positions on the page.

**METHOD AND SYSTEM FOR OPTIMUM PLACEMENT OF
ADVERTISEMENTS ON A WEBPAGE**

ABSTRACT

5 A method and system for placement of graphical objects on a page to
optimize the occurrence of an event associated with such objects. The
graphical objects might include, for instance, advertisements on a webpage, and
the event would include a user clicking on that ad. The page includes positions
for receipt of the object material. Data regarding the past performance of the
10 objects is stored and updated as new data is received. A user requests a page
from a server associated with system. The server uses the performance data to
derive a prioritized arrangement of the objects on the page. The server performs
a calculation regarding the likelihood that an event will occur for a given object,
as displayed to a particular user. The objects are arranged according to this
15 calculation and returned to the user on the requested page. The likelihood can
also be multiplied by a weighting factor and the objects arranged according to
this product.

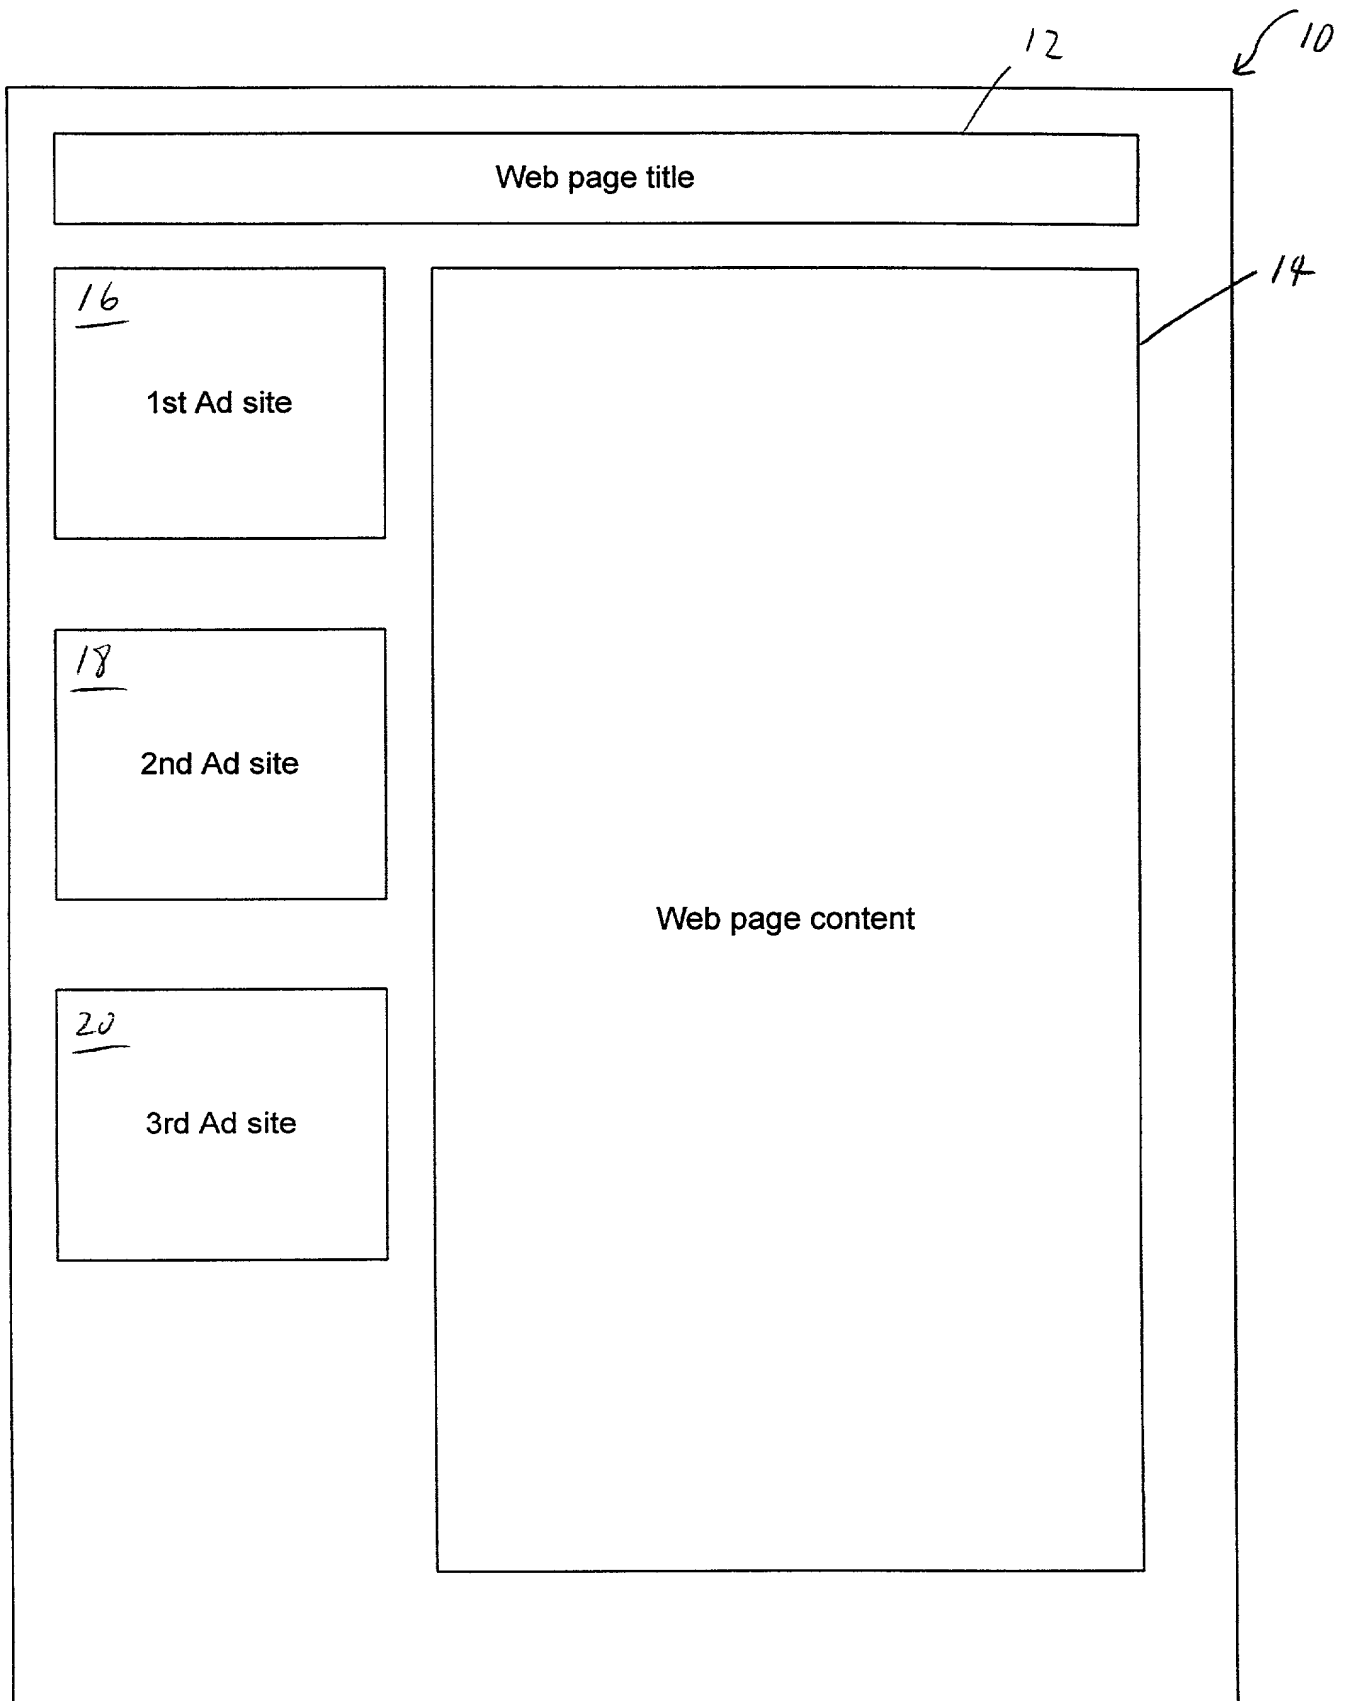


Figure 1 (Prior art)

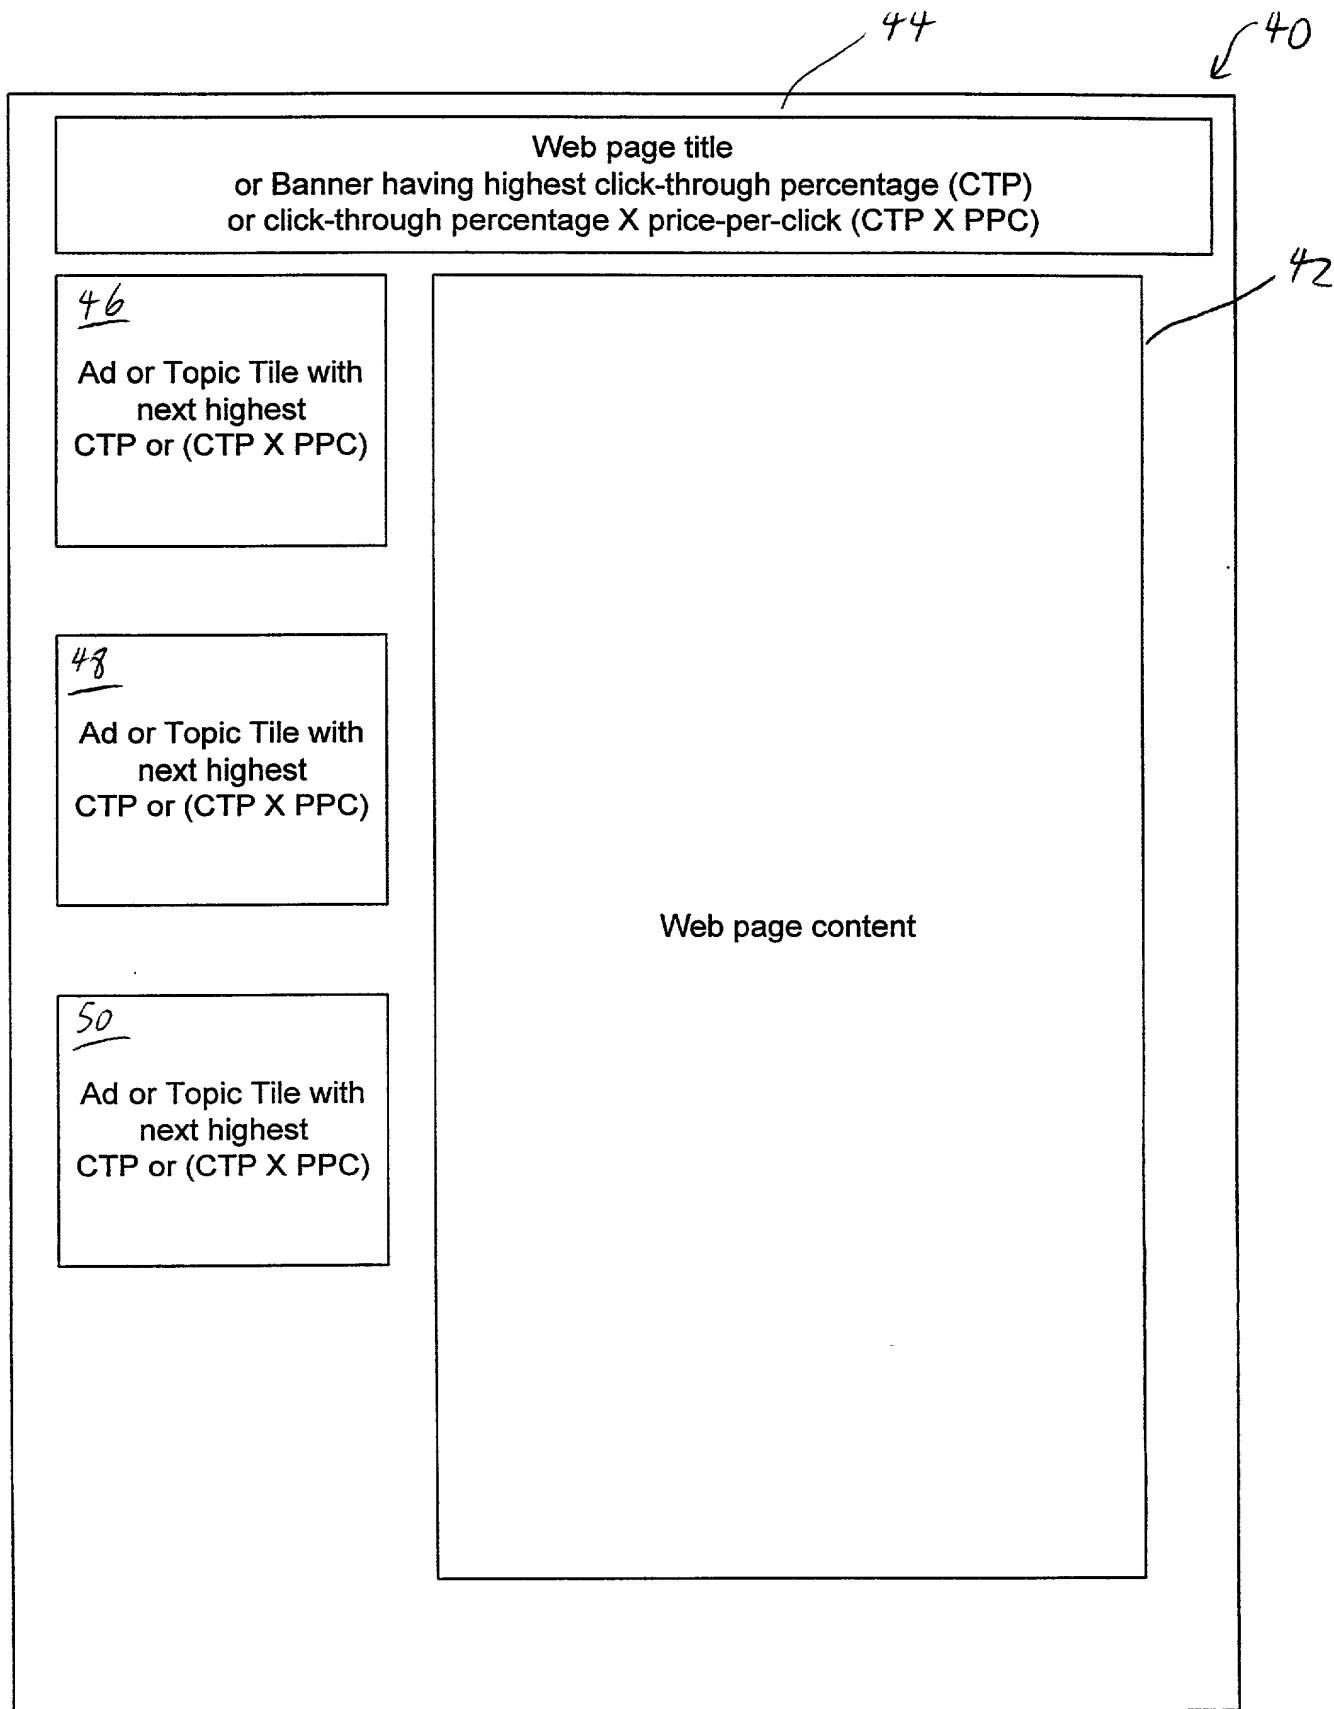


Figure 2

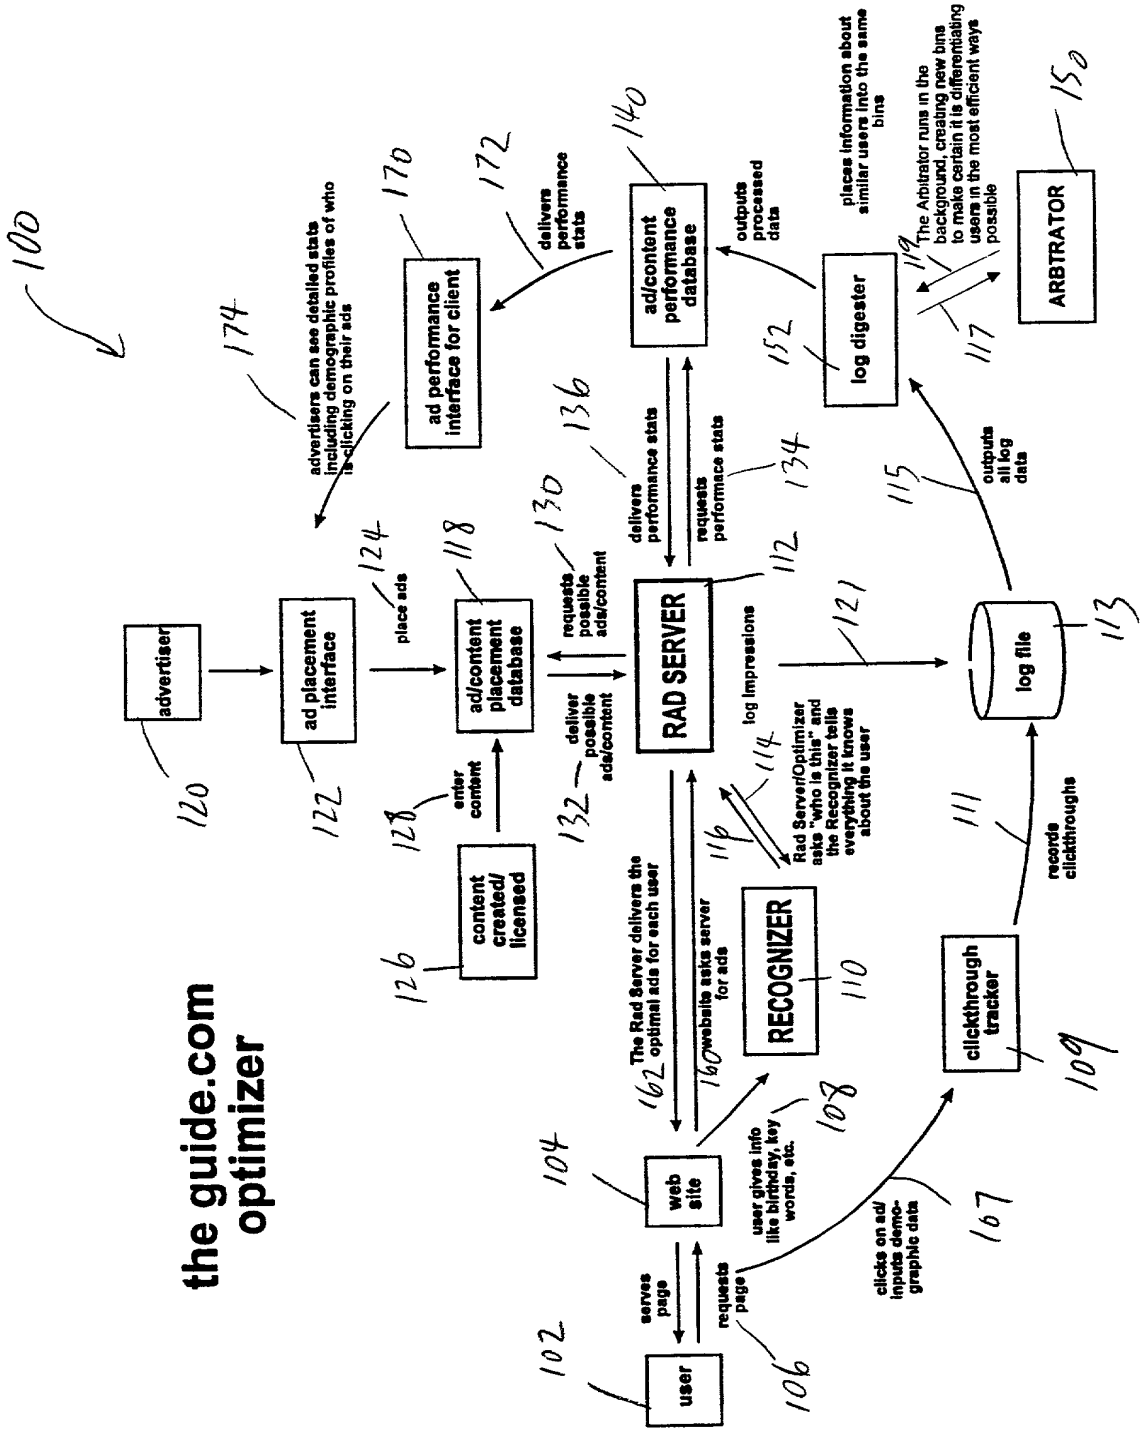


Figure 3(A)



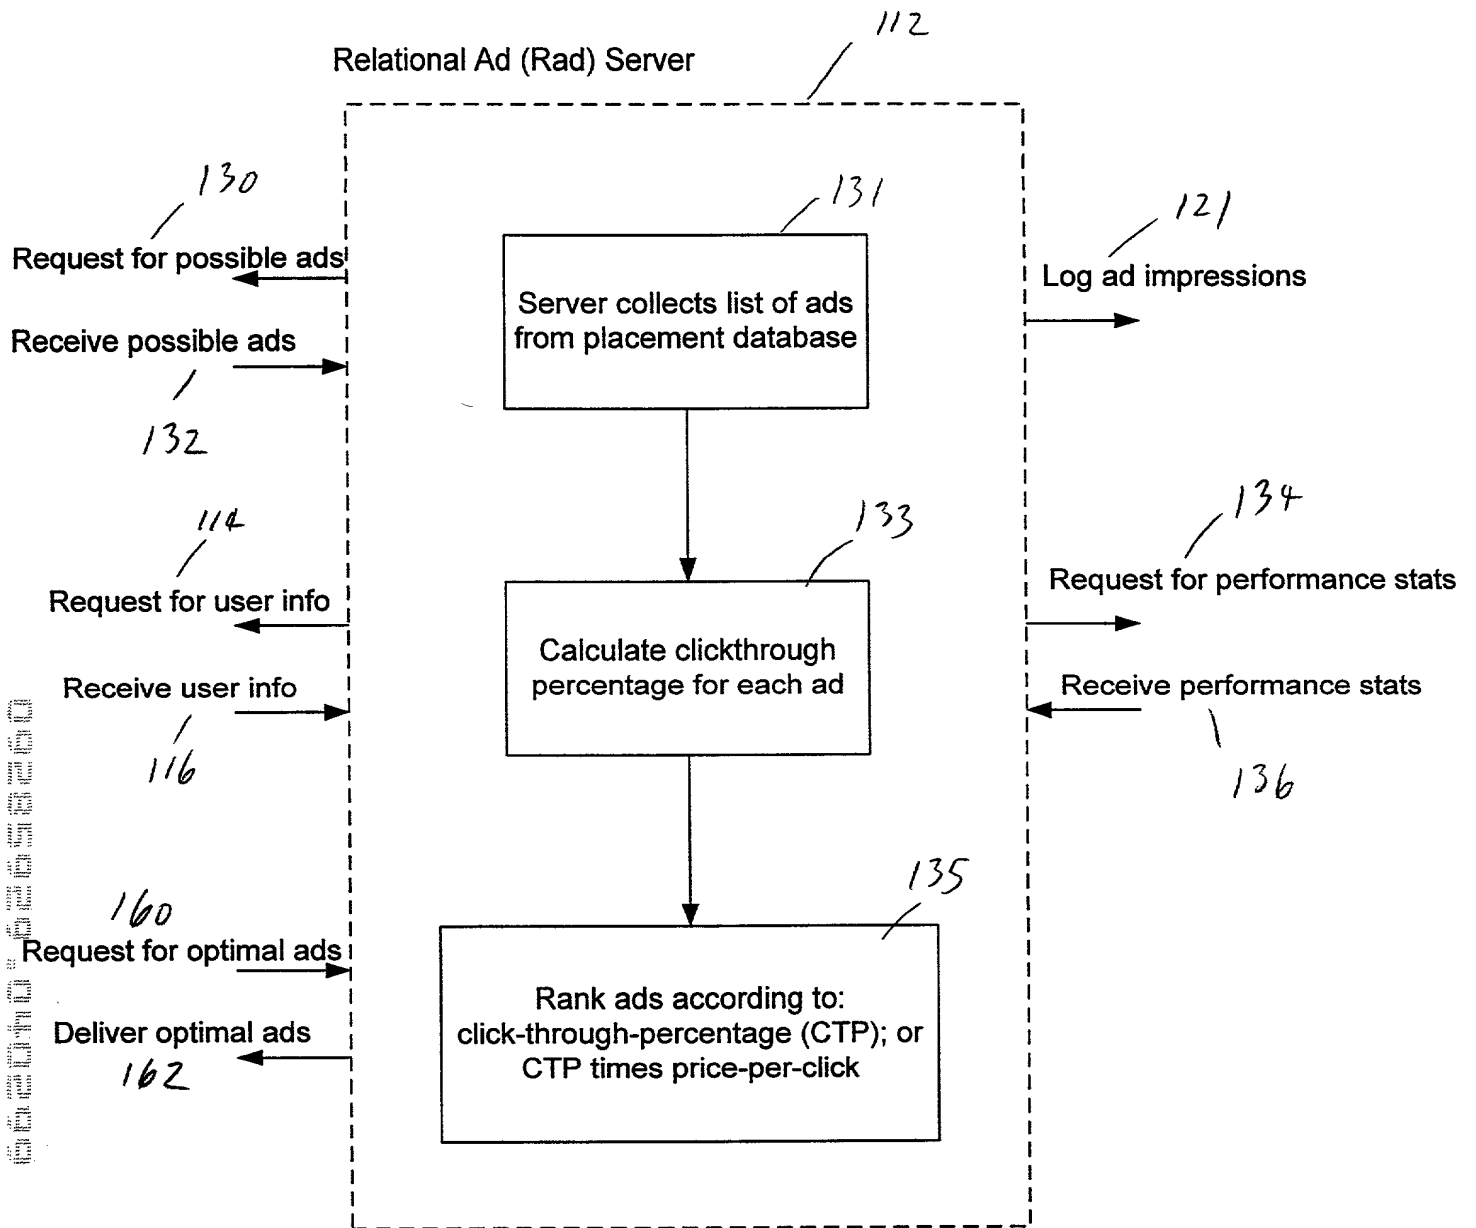


Figure 3(b)


(a)

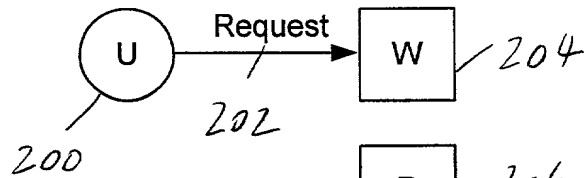


(b)

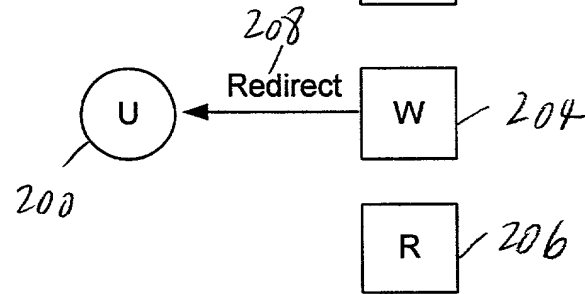


(c)

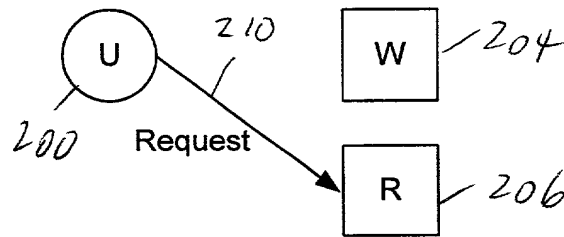

(d)

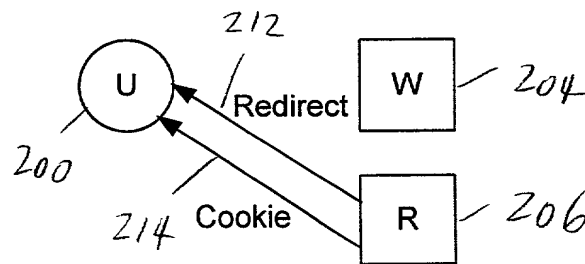

(e)

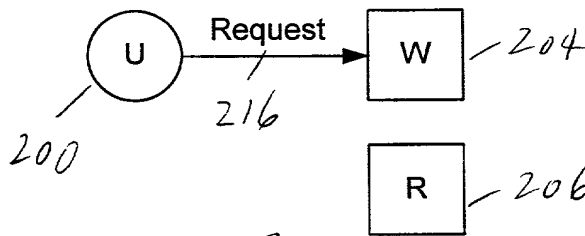

(f)

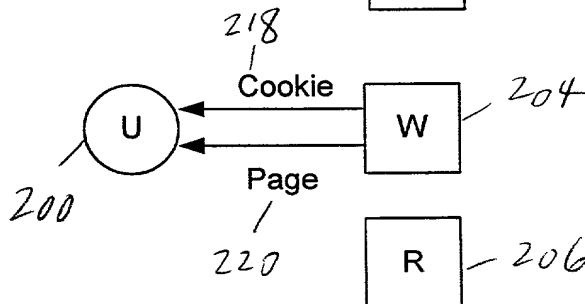


Figure 4







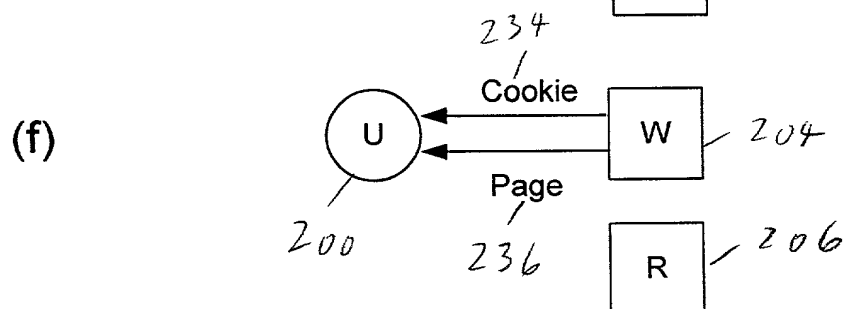


Figure 5

(a)

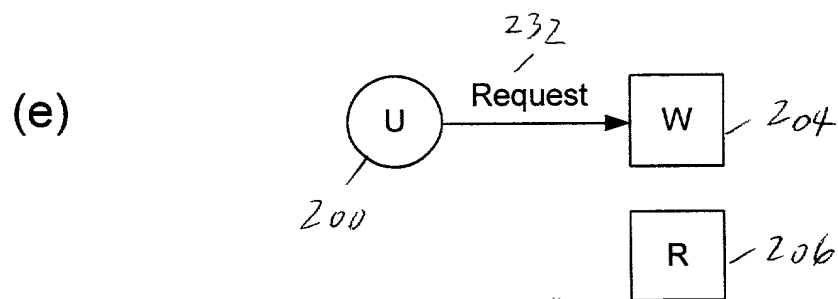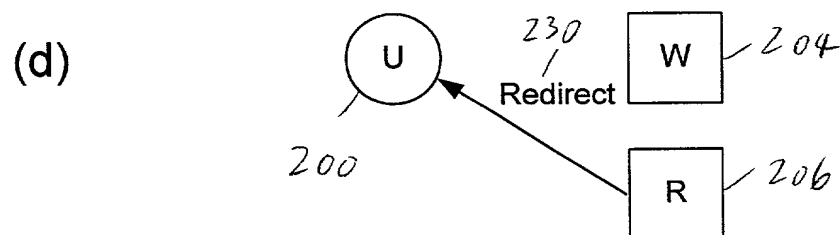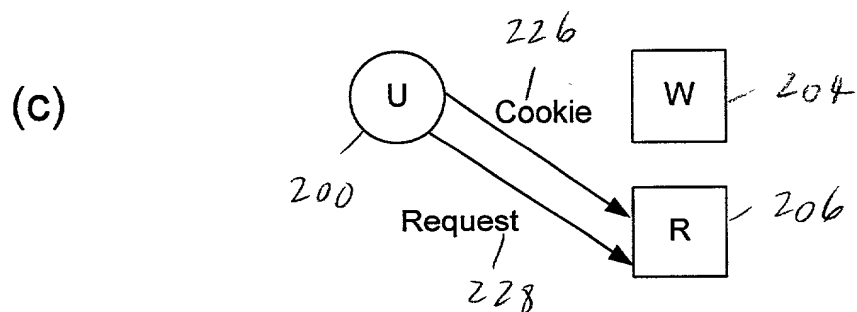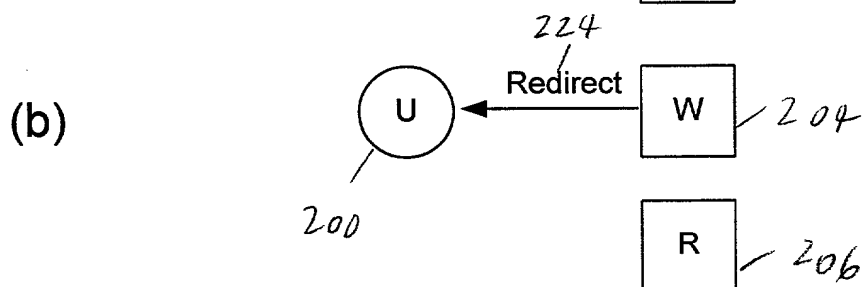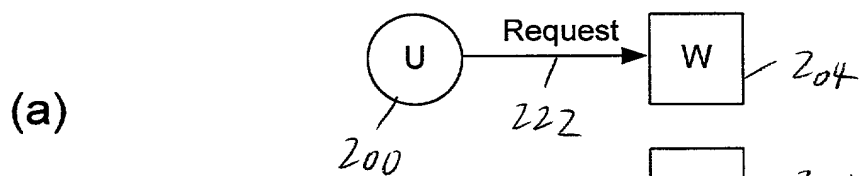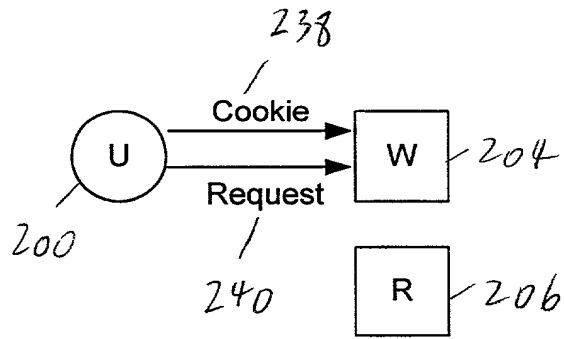

(b)

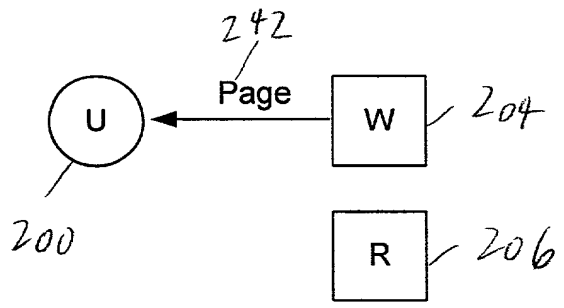


Figure 6